QUICKLIFT USA

FOUR POST ACCESSORIES



COMPATIBLE WITH QUICK LIFT USA
8K & 9K XL FOUR-POST LIFTS

QLJBH3500
HAND JACKING BEAM

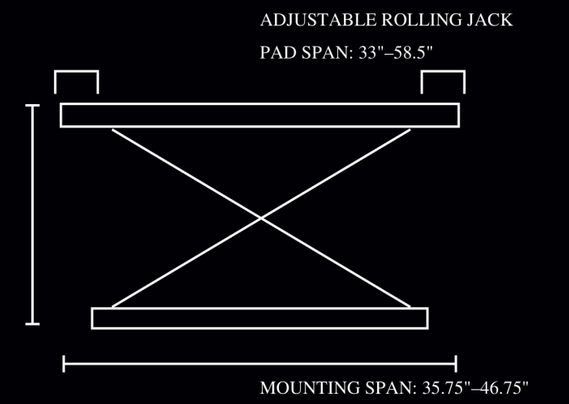
PRODUCT DESCRIPTION

- Lift one end of a vehicle off the runways for tire, brake and suspension service. This rolling jacking beam supports a total load of up to 3,500 lb.
- An optional upgrade for Quick Lift USA's standard 8,000 lb and 9,000 lb XL four-post lifts. Roll the unloaded beam along the rails to reach the lifting points.
- A hand-operated hydraulic pump raises the beam without compressed air. The release valve provides controlled lowering.
- Adjustable support arms and rubber contact pads align with approved vehicle lifting points. Adapters provide additional clearance for compatible applications.
- The mechanical safety lock supports the raised load during service. Always settle the beam onto the lock and chock the wheels that remain on the runways.
- Compatible with many other standard four-post lifts when rail spacing, rail profile and mounting fit match. Includes an automatic two-year warranty on all non-wearable parts.

QLJBH3500
HAND JACKING BEAM

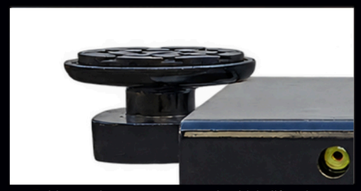


Technical parameters	
Model	QLJBH3500
Rated capacity	3,500 lb
Operation	Hand hydraulic
Lifting travel	8.25 in.
Safety system	Mechanical lock
Contact pads	Rubber
Support arms	Adjustable
Quick Lift compatibility	Standard 8K / 9K XL
Pad span	33–58.5 in.
Mounting span	35.75–46.75 in.
Front-to-back dimension	21 in.
Net weight	254 lb
Shipping weight	276 lb
Other brands	Confirm rail fit
Warranty	2 years, non-wearable



Dimensions shown in inches. Marketing dimensions are rounded.

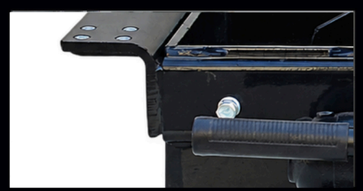
Detail


Rubber pads contact approved vehicle lift points.


Extendable arms adjust the pad spacing.


The scissor assembly raises the support platform.


Hand pump provides hydraulic lifting control.


Mounting supports ride on compatible lift rails.


Hydraulic connections supply the lifting cylinder.

ACCREDITED BUSINESS BBB

QUICKLIFT USA
OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234
CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM