QUICKLIFT USA

FOUR POST ACCESSORIES



QL6KRBG

6,000 LB AIR JACKING BEAM

PRODUCT DESCRIPTION

Raise one end of a vehicle off the runways for wheel, brake and suspension service. Designed for Quick Lift 10,000 lb and HD 12,000 lb four-post lifts.

- Air-over-hydraulic foot pump
- Adjustable arms and rolling support base
- Rubber pads and 2.5 in. adapters
- Mechanical safety lock
- Air compressor not included
- 2-year manufacturer warranty


QL6KRBG

6,000 LB AIR JACKING BEAM

TECHNICAL SPECIFICATIONS

Lifting capacity	6,000 lb
Pad reach (A)	33.07-53.43 in.
Minimum frame height (B)	8.46 in.
Support-base span (C)	33.86-52.83 in.
Minimum rubber-pad height (D)	8.62 in.
Maximum height without / with adapters	17.76 / 20.28 in.
Overall width (F)	20.08 in.
Included adapters	Two 2.5 in. adapters
Air supply	Greater than 116 PSI
Air treatment	Air filter / water separator required

DIMENSIONAL DRAWING | INCHES

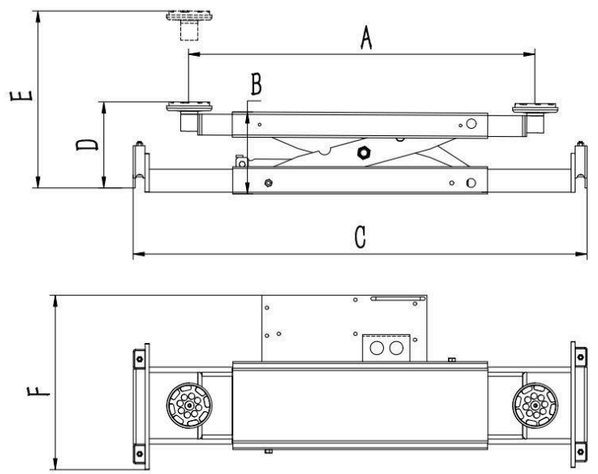

ACCREDITED BUSINESS BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM