QUICKLIFT USA

TWO POST LIFT SERIES



QL9KCF

TWO POST CLEAR FLOOR LIFT

PRODUCT DESCRIPTION

- The 9,000 lb clear-floor design keeps the workspace between the columns open for vehicle service and shop equipment. It accommodates cars, trucks, and SUVs within its capacity and lifting-point requirements.
- Super-asymmetrical arms allow flexible vehicle positioning and improved door access. Standard door guards and arm toe guards help protect the vehicle and operator.
- Dual direct-drive hydraulic cylinders, self-lubricating UHMW polyethylene sliders, and bronze bushings support smooth, dependable carriage movement.
- A single-point release disengages both column safety locks. Equalizer cables help the carriages travel together, and an overhead shut-off bar stops upward travel when contacted.
- Two standard column-height settings accommodate different ceiling heights. The electric/hydraulic power unit uses a 220V supply.

• Includes a 3 in. extension adapter and adjustable screw pad. Heavy-duty saddle adapters are available separately.


QL9KCF

TWO POST CLEAR FLOOR LIFT




Technical parameters	
Model	QL9KCF
Lifting capacity	9,000 lb
Lifting height A	71.5-80.5 in.
Overall height B	142.5 / 150.5 in.
Overall width C	135 in.
Drive-through clearance D	99.5 in.
Between columns E	112.25 in.
Minimum pad height F	3.5 in.
Minimum height G	5.25 in.
Gross weight	1,516 lb
Motor / power	2 HP / 220V, single-phase
Lifting time	57 seconds
Packing dimensions	110.25 x 17.75 x 32.5 in.

FRONT VIEW




TOP VIEW




A-G refer to the matching specifications at left.

Detail

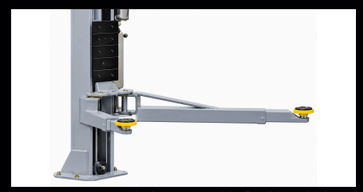


Super-asymmetrical arms provide flexible vehicle positioning.

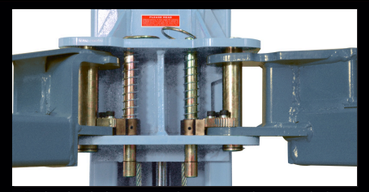

Spring-loaded arm restraints secure the arms during lifting.




Carriage assembly supports the lifting arms.

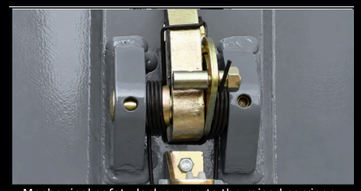

Mechanical safety lock supports the raised carriage.



Overhead shut-off switch stops upward travel on contact.

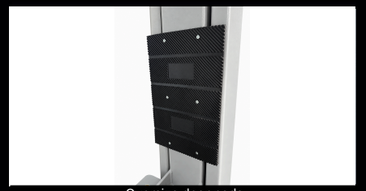

Oversize door pads

ACCREDITED BUSINESS BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM