QUICKLIFT USA

TWO POST LIFT SERIES



QL15KCF

TWO POST CLEAR FLOOR LIFT

PRODUCT DESCRIPTION

- The 15,000 lb clear-floor design keeps the workspace between the columns open for vehicle service and shop equipment. It accommodates cars, trucks, and SUVs within its capacity and lifting-point requirements.
- Four heavy-duty, symmetrical, two-stage arms extend to reach lifting points on compatible vehicles. Automatic arm restraints secure the arms during lifting. Door guards and toe guards help protect the vehicle and operator.
- Dual direct-drive hydraulic cylinders, self-lubricating UHMW polyethylene sliders, and bronze bushings support smooth, dependable carriage movement.
- A single-point release disengages both column safety locks. Equalizer cables help the carriages travel together, and an overhead shut-off bar stops upward travel when contacted.
- Three column-height settings—174, 186, or 198 in.—accommodate different ceiling heights. Reinforced columns support a 123.5 in. width between them. The 2 HP power unit uses a 220V, single-phase supply.
- Includes adjustable screw pads, 3 in. and 6 in. extension adapters, and heavy-duty saddle adapters for compatible lifting points.
- Requires 6 in. concrete rated at least 3,500 psi.

QL15KCF

TWO POST CLEAR FLOOR LIFT



Technical parameters	
Model	QL15KCF
Lifting capacity	15,000 lb
Max. lifting height A	75-76.25 in.*
Max. lift with extensions	84-85.25 in.*
Overall height B	174 / 186 / 198 in.
Overall width C	150.75 in.
Drive-through clearance D	109.75 in.
Between columns E	123.5 in.
Minimum pad height F	7 in.*
Gross weight	2,573 lb
Motor / power	2 HP / 220V, single-phase
Lifting time	84 seconds
Packing dimensions	113.75 x 21.25 x 41.25 in.

FRONT VIEW



TOP VIEW



* Rounded rubber-pad heights vary with adjustment. See manual for saddle-pad and lock heights.

Detail



Heavy-duty symmetrical two-stage arms reach compatible lifting points.

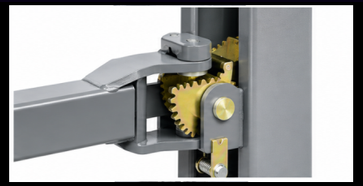

Automatic arm restraints secure the arms during lifting.



Oversized door pads help protect vehicle doors.



Adjustable screw pads and 3 in. / 6 in. extension adapters included.



Overhead shut-off bar stops upward travel on contact.



Mechanical safety locks secure the carriages at working height.

ACCREDITED BUSINESS BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM