

SCISSOR LIFT SERIES



QLSL6

UTV / AUTO SCISSOR LIFT

PRODUCT DESCRIPTION

- The QLSL6 lifts compatible UTVs and vehicles up to 6,000 lb for indoor inspection, maintenance and repair. Its compact scissor design provides convenient service access.
- Two hydraulic cylinders raise the steel platform. Sliding and rotating arms align all four rubber pads with the vehicle manufacturer's designated lift points.
- Maximum lifting height is approximately 55 in., with a 5.25 in. minimum height. The 63 in. platform offers adjustable arm spacing for compatible vehicles.
- A mechanical safety rack supports the raised platform. The manual release disengages the lock for lowering. Always settle the lift onto the safety lock before working underneath.
- A prewired 110V single-phase hydraulic power unit mounts on a wheeled trolley. The trolley and transport wheels allow the fully lowered, unloaded lift to be repositioned.
- Use the lift on suitable level concrete and keep the load centered. Height adapters are included. All non-wearable parts carry an automatic two-year warranty, with no registration required.

QLSL6


UTV / AUTO SCISSOR LIFT




Technical parameters

Model	QLSL6
Lifting capacity	6,000 lb
Maximum lifting height	55 in.
Minimum height	5.25 in.
Platform length	63 in.
Platform width	39.25 in.
Overall length	78.25 in.
Arm span reference	66.75 in.
Arm adjustment reference	32.25–50 in.
Inner span reference	39.5 in.
Inner frame reference	30 in.
Lifting time	Approx. 45 seconds
Safety release	Manual
Electrical supply	110V, single-phase
Design	Mobile, electro-hydraulic

SIDE VIEW

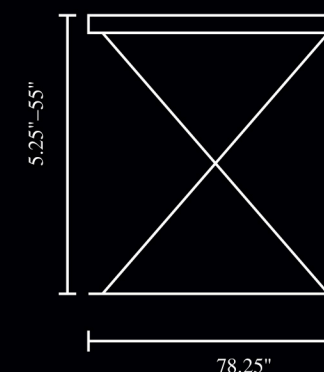

TOP VIEW

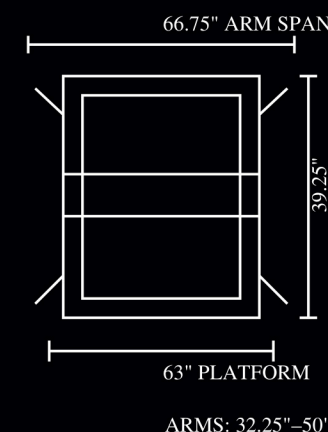

Dimensions shown in inches. Marketing dimensions are rounded.

Detail



The mechanical safety system supports the raised platform.




Rubber pads and height adapters contact the lift points.



Twin hydraulic cylinders power the scissor assembly.



The trolley connection helps move the unloaded lift.

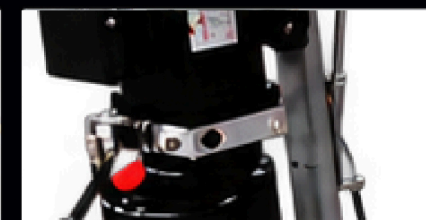

The hydraulic power unit has accessible operator controls.



Sliding and rotating arms adjust to compatible lift points.

