QUICKLIFT USA

FOUR POST LIFT SERIES



QL4P12KHD

HEAVY-DUTY FOUR POST LIFT

PRODUCT DESCRIPTION

12,000 lb capacity for vehicle inspection, service and compatible alignment work.

20" diamond-plate steel runways with adjustable clear spacing of 39" to 50.875".

Integrated slip plates, adjustable turnplate pockets and steel approach ramps.

Mechanical locks with air-operated release and secondary slack-cable safety devices.

2 HP / 220V single-phase hydraulic power. Maximum runway height: 75.5625".

Optional hand or pneumatic jacking beams. Automatic 2-year warranty on non-wearable parts.

ACCREDITED BUSINESS BBB

QL4P12KHD


HEAVY-DUTY FOUR POST LIFT




TECHNICAL SPECIFICATIONS

Lifting Capacity	12,000 lb
Maximum Lifting Height	75.5625"
Top-Lock Runway Height	72.875"
Overall Height	86"
Overall Length With Ramps	236.75"
Overall Length Without Ramps	200.75"
Overall Width	126.25"
Width Between Columns	112.25"
Drive-Through Clearance	98.375"
Clear Space Between Runways	39" to 50.875"
Runway Width	20"
Motor / Electrical Supply	2 HP / 220V, 1-phase
Lifting Time	63 seconds
Gross Weight	2,941 lb

FRONT VIEW

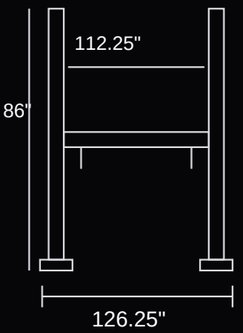

TOP VIEW

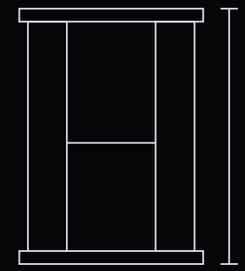


39" to 50.875" clear

Drive-under clearance: 68.125" maximum / 65.375" on top safety lock

Detail




Steel drive-on approach ramps

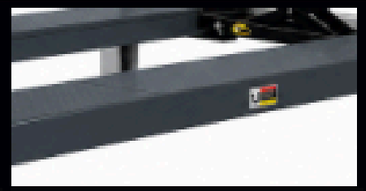


Diamond-plate steel runways




Optional rolling jacking beam

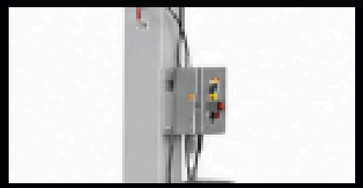

Air-operated safety-lock release

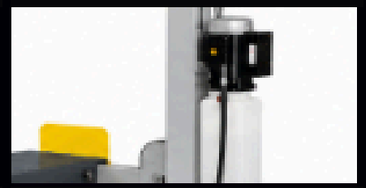

2 HP / 220V hydraulic power unit

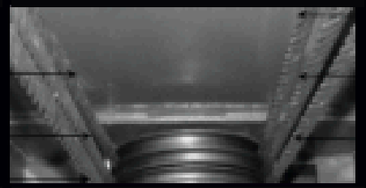

Lifting cables and runway pulleys

QUICKLIFT USA

OPEN TO THE PUBLIC
3308 S. POWER RD. #105
GILBERT, AZ 85234

CALL / TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM