QUICKLIFT USA

FOUR POST LIFT SERIES



QL10K
FOUR POST LIFT


PRODUCT DESCRIPTION

- Built for cars, trucks, SUVs, and other vehicles within its 10,000 lb capacity and runway dimensions. The lift provides elevated parking and access for inspection and maintenance.
- Heavy-duty square towers feature an over-the-column design for sturdy support. High-strength steel crossbeams and diamond-plate runways provide a durable structure and surface for vehicle tires.
- The adjustable manual release handle returns to its resting position after use. A flexible metal linkage allows the locks to be released at the highest position.
- Mechanical locks support the lift at designated heights. Each lifting cable has a separate safety mechanism that engages if the cable breaks.
- Yellow ramp edge strips make the edges easier to see and help protect them against wear.
- Includes aluminum approach ramps. A hydraulic burst-protection valve helps prevent rapid lowering if a line ruptures.

QL10K
FOUR POST LIFT




Technical parameters	
Model	QL10K
L*W*H	260-9/16 * 128-3/4 * 107-7/16 inches
Lifitng Capacity	10000LBS
Lifting height	92-3/8 inches
Width between column	114 inches
Platform Length	205 inches
Width Between Runway	42-1/16 - 48 inches
Runway Width	20 inches
Traffic width	103 inches
Package size	207-1/2*22-1/16*29-15/16 inches
Gross weight	2500lb

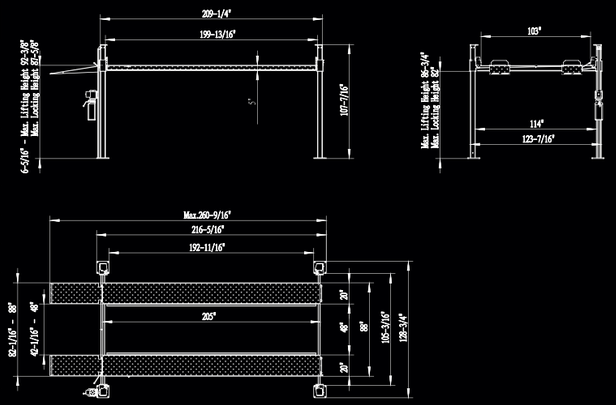

Detail



Yellow ramp edge strips improve visibility and help protect against wear.

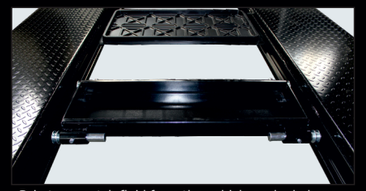


Drip trays catch fluid from the vehicle parked above.




Hydraulic burst protection helps prevent rapid lowering if a line ruptures.



Lifting cables and pulleys run beneath the runways.

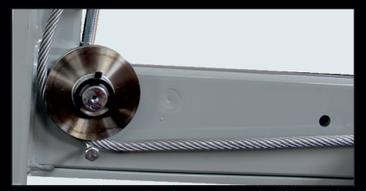

A separate safety mechanism engages if a lifting cable breaks.

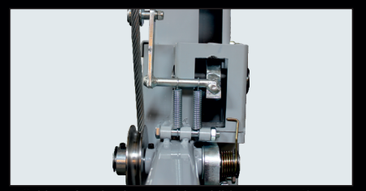

Cable safety latches provide additional protection at each column.

ACCREDITED BUSINESS BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM