
TWO POST LIFT SERIES

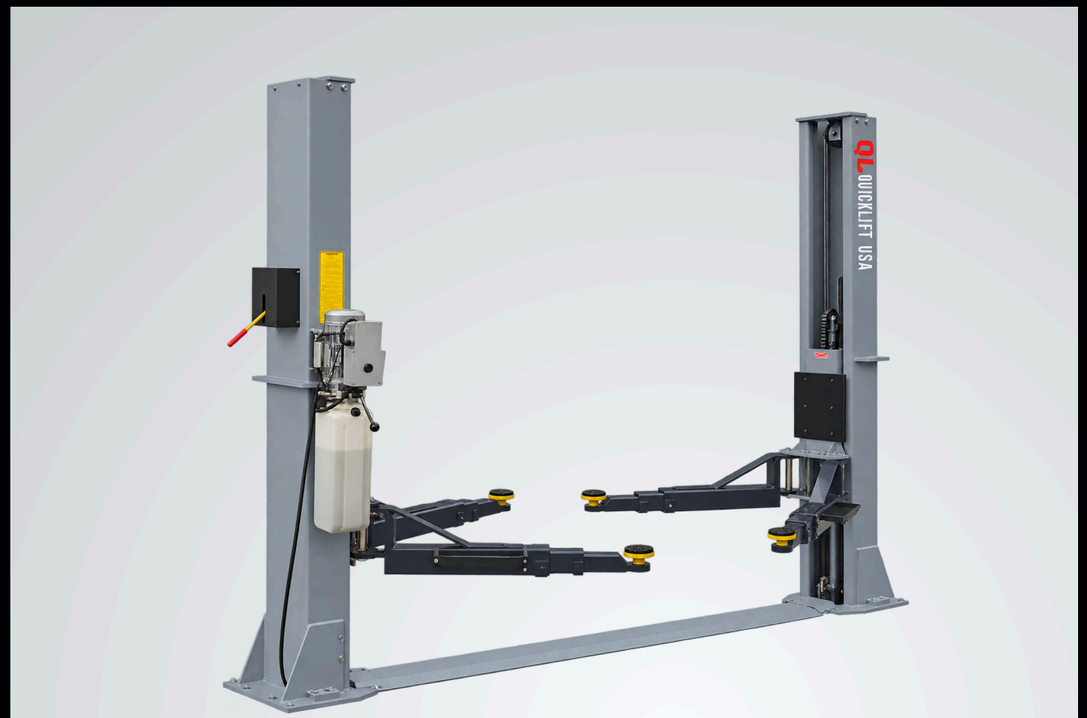


QL12KBP
TWO POST BASEPLATE LIFT

PRODUCT DESCRIPTION

- The 12,000 lb baseplate design supports compatible cars, trucks, and SUVs. Its floor-level crossover eliminates the overhead beam for lower ceilings.
- Four symmetrical, three-stage arms reach vehicle lifting points. Automatic restraints secure the arms during lifting. Guardrails and door guards help protect the vehicle and operator.
- Dual hydraulic cylinders use a chain-and-pulley drive. Equalizer cables, UHMW sliders, and bronze bushings support smooth, synchronized travel.
- Two installation widths provide 118.25 or 123.5 in. between the columns. Select the cable, hose, and floor-cover arrangement that matches your shop layout.
- A single-point safety release operates both column locks. The 2 HP power unit uses a 220V, single-phase supply. Reinforced bases support the heavy-duty column structure.
- Includes 3 in. and 6 in. extension adapters and adjustable screw pads for compatible lifting-point heights. The floor cover protects the crossover components.

QL12KBP
TWO POST BASEPLATE LIFT




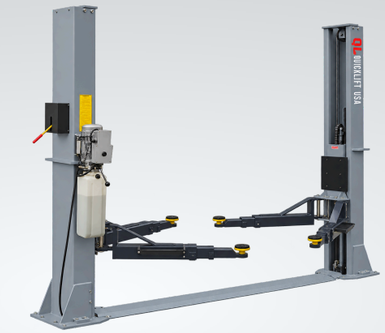


Technical parameters	
Model	QL12KBP
Lifting capacity	12,000 lb
Max. lifting height A	73.25 in.
Max. lift with extensions	82.25 in.
Overall height B	122.5 in.
Overall width C	145.5 / 150.75 in.
Drive-through clearance D	104.5 / 110 in.
Between columns E	118.25 / 123.5 in.
Minimum pad height F	4.75 in.
Gross weight	2,150 lb
Motor / power	2 HP / 220V, single-phase
Lifting time	55 seconds
Packing dimensions	115 x 22.5 x 36.25 in.

Minimum concrete: 6 in. thick | 3,500 psi


FRONT VIEW

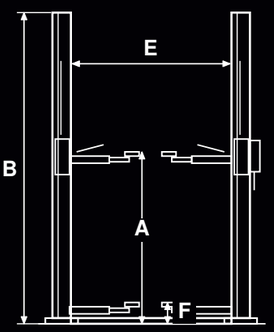


TOP VIEW

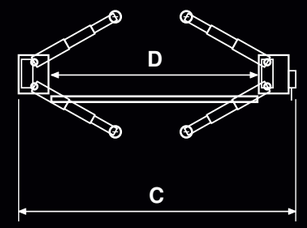

Detail

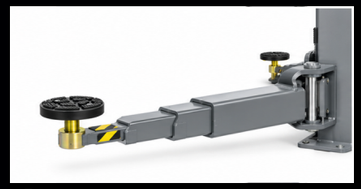

Three-stage arms provide flexible lifting-point reach.

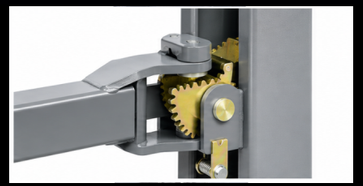

Automatic arm restraints help secure the arms.



Adjustable screw pads accommodate lifting-point heights.



Mechanical safety locks support the raised carriages.



2 HP power unit | 220V, single-phase.



Oversized door pads help protect vehicle doors.

ACCREDITED BUSINESS BBB

QL QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM