QUICKLIFT USA

FOUR POST ACCESSORIES



QLJBA3500

AIR JACKING BEAM

PRODUCT DESCRIPTION


- Lift one end of a vehicle off the runways for tire, brake and suspension service. This rolling jacking beam supports a total load of up to 3,500 lb.
- An optional upgrade for Quick Lift USA's standard 8,000 lb and 9,000 lb XL four-post lifts. Roll the unloaded beam along the rails to reach the lifting points.
- An air-powered hydraulic foot pump raises the beam with convenient pedal control. Compatible with most air compressors delivering 125 PSI at 10–20 CFM. The compressor / air-supply pump is not included.
- Adjustable support arms and rubber contact pads align with approved vehicle lifting points. Adapters provide additional clearance for compatible applications.
- The mechanical safety lock supports the raised load during service. Always settle the beam onto the lock and chock the wheels that remain on the runways.
- Compatible with many other standard four-post lifts when rail spacing, rail profile and mounting fit match. Includes an automatic two-year warranty on all non-wearable parts.

QLJBA3500

AIR JACKING BEAM



Technical parameters	
Model	QLJBA3500
Rated capacity	3,500 lb
Operation	Air / hydraulic
Lifting travel	8.25 in.
Safety system	Mechanical lock
Contact pads	Rubber
Support arms	Adjustable
Quick Lift compatibility	Standard 8K / 9K XL
Adapter heights	1.25 / 5 in.
Control	Foot pedal
Air supply	125 PSI / 10–20 CFM
Other brands	Confirm rail fit
Warranty	2 years, non-wearable

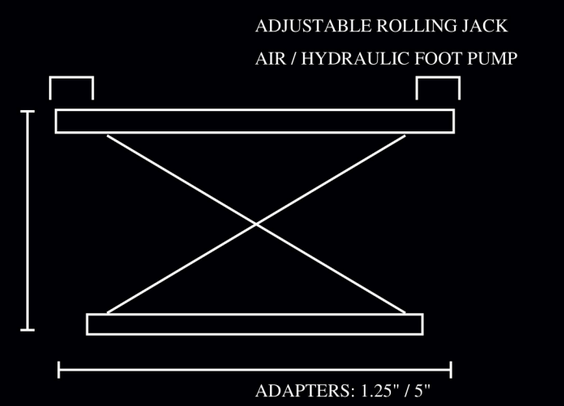

Dimensions shown in inches. Marketing dimensions are rounded.

Detail



Rubber pads contact approved vehicle lift points.



Extendable arms adjust the pad spacing.



The scissor assembly raises the support platform.



Air / hydraulic foot pump controls lifting.



Mounting supports ride on compatible lift rails.



Hydraulic connections supply the lifting cylinder.

ACCREDITED BUSINESS
BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 S. POWER RD. #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM