QUICKLIFT USA

2 IN 1 AIR COMPRESSOR





QL-6HP & QL-10HP

PRODUCT DESCRIPTION

- 6 HP: 6.36-15.78 CFM | 145 PSI maximum
- 10 HP: 35 CFM at 145 PSI
- Integrated ASME-certified receiver
- 27-gallon 6 HP tank | 55.5-gallon 10 HP tank
- 220 V / 60 Hz / single-phase power
- Variable speed, direct drive
- Continuous duty for home and commercial shops
- Simple 6 HP display | 10 HP touchscreen
- Oil lubrication for long-term durability
- Service packages and scheduled maintenance
- 2-year manufacturer warranty
- Free local delivery within 25 miles | Shipping


Technical Parameters

SPECIFICATION	QL-6HP	QL-10HP
MOTOR POWER	6 HP	10 HP
MAXIMUM PRESSURE	145 PSI	145 PSI
AIR DELIVERY	6.36-15.78 CFM	35 CFM AT 145 PSI
POWER SUPPLY	220 V / 60 Hz / 1-PHASE	220 V / 60 Hz / 1-PHASE
PACKAGE FULL-LOAD CURRENT	20.31 A	26.78 A
SOUND, WITHOUT DUCT	60 +/- 2 dB(A)	60 +/- 2 dB(A)
DRIVE / SPEED CONTROL	DIRECT / VARIABLE	DIRECT / VARIABLE
AIR OUTLET THREAD	G1/2 (1/2 in. BSPP)	G3/4 (3/4 in. BSPP)
ASME RECEIVER CAPACITY	27 US gal	55.5 US gal
OVERALL LENGTH	44.17 in.	47.40 in.
OVERALL WIDTH	20.69 in.	27.05 in.
OVERALL HEIGHT	43.70 in.	56.85 in.
WEIGHT	286.6 lb dry	Approx. 794 lb assembly

Upgrade your workspace with Quick Lift USA's 2-in-1 Rotary Screw Air Compressors. Choose a 6 HP or 10 HP system with 220 V, 60 Hz single-phase power, variable-speed direct drive and an integrated ASME-certified air receiver. The 6 HP uses a simple digital display; the larger 10 HP uses an advanced touchscreen.


Quick Lift USA offers routine oil changes, filter replacement and scheduled service packages. Free local delivery within 25 miles of Gilbert, AZ. Nationwide shipping available. Add downstream drying and filtration when your application requires it.

QL-6HP SERVICE ACCESS

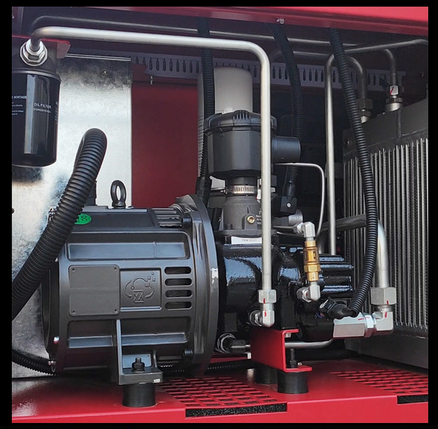

QL-10HP SERVICE ACCESS





ACCREDITED BUSINESS
BBB

QUICKLIFT USA

OPEN TO THE PUBLIC
3380 SOUTH POWER ROAD #105
GILBERT, AZ 85234

CALL/TEXT
602-828-0950
INFO@QUICKLIFTUSA.COM